



CESTAL00024


Profilo simmetrico a 45° da utilizzare in applicazioni dove è necessaria una buona resa luminosa andando al tempo stesso a contenere gli ingombri quali ad esempio: illuminazione di mensole con la possibilità di avere il fascio luminoso orientato verso la zona espositiva. Utilizzato anche in applicazioni quali l'illuminazione di soffitti con travi a vista. Un profilo altamente dissipante grazie al suo design massiccio e con molta superficie di scambio.

45° symmetrical profile to be use in applications where a good light output is required while at the same time containing the dimensions such as lighting of shelves with the possibility of having the light beam oriented towards the exhibition area. Also used in applications such as beamed ceiling lighting. A highly dissipating profile thanks to its massive design and plenty of exchange surface.



Profilo adatto per la realizzazione di prodotti che hanno ottenuto la certificazione UL Listing di conformità ai requisiti di sicurezza per USA e Canada.

Profile suitable for the realization of products that have obtained the certification UL Listing for compliance with safety requirements for USA and Canada.

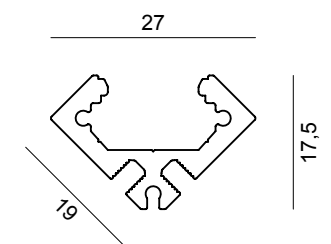

CESTAL00024



Materiale:
Material:

Dimensione:
Dimension:

Lunghezza:
Length:

Tipi di installazione:
Types of installation:

Estruso in alluminio
Extruded aluminum

27 × 17,5 mm

Fino a 6 metri
Up to 6 meters



FINITURE FINISHING

---.A1



All. Anodizzato
Anod. aluminum

---.A5



Nero
Black

CROMALINE



TERMINALI END CAPS

CMATVA00026



Coppia di tappi in plastica stampati
Couple of printend plastic caps

CMATVA00026 Q



Coppia di tappi in plastica lente 40°
Couple of plastic caps 40° lens


CMATVA00026 S



Coppia di tappi in plastica copertura stondata
Couple of plastic caps rounded cover

ACCESSORI ACCESSORIES

CMATVA00124



Clip di fissaggio in acciaio
Steel fixing clip

DIFFUSORI DIFFUSERS

CESTPL00001



Trasparente
Transparent



18 mm

CESTPL00002



Opalina
Opal



18 mm

CESTPL00007



Lente 40°
40° Lens



22,5 mm


CESTPL00014



Stondata - opalina
Rounded - opal



22 mm

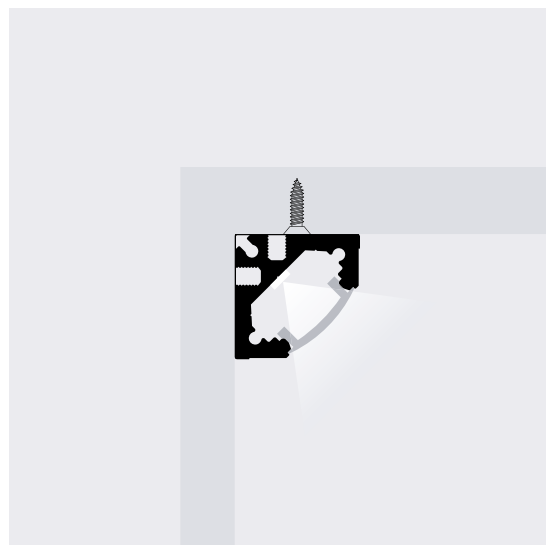

PLAFONE CEILING

CESTAL00024

CMATVA00124

